

**Fanlar**




**“ebmpapst”**


**Geriye Eğik Kanatlı Santrifüj Fanlar**

**R4D500 AT03 - 01**


Phase		3~	3~
Nominal voltage	[V]	230	400
Connection		D	Y
Frequency	[Hz]	50	50
Type of data definition		ml	ml
Valid for approval / standard		CE	CE
Speed	[min <sup>-1</sup> ]	1375	1375
Power input	[W]	1430	1430
Current draw	[A]	5.2	3
Min. back pressure	[Pa]	0	0
Max. ambient temperature	[°C]	85	85
Air flow	[m <sup>3</sup> /h]	8320	8320
Back pressure	[Pa]	0	0
Sound pressure level	[dB(A)]	78	78

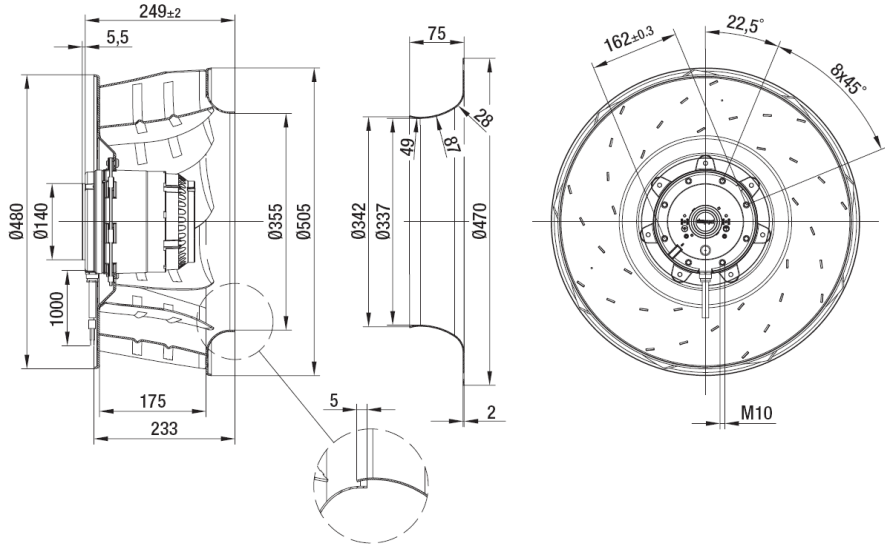

**Performans (50Hz) :**

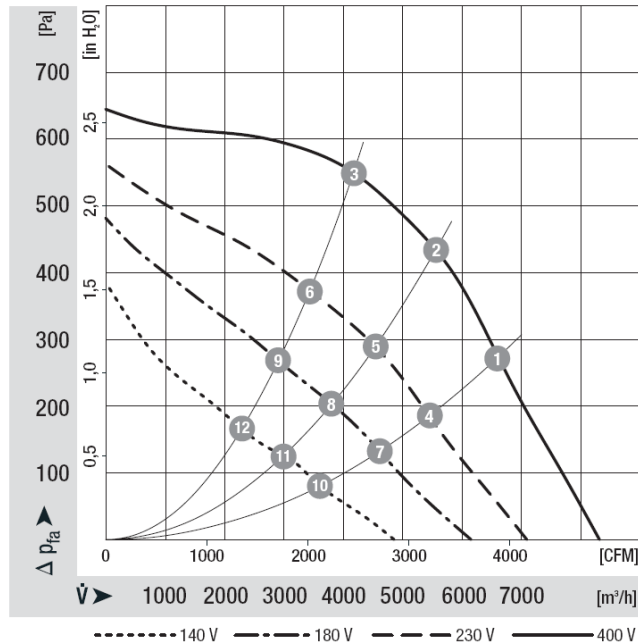

**Bağlantı:**  
**Üçgen (3~ 230 VAC)**

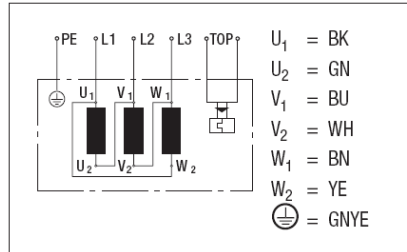

**Yıldız (3~ 400 VAC)**

